

Tel: 01327 311011
FAX: 01327 300216
Email: sales@kaver.co.uk
Web: www.foxstandpipes.co.uk

foxstandpipes
9-11 Siddeley Way
Royal Oak Estate
Daventry
Northants
NN11 8PA



FOX S Pillar

Standpipe Enclosure, Surface Mount



The FOX S Pillar standpipe enclosure offers the same features and benefits of our standard pillar in a format designed for surface mount bolt-down installation.

FOX pillars are used by water companies throughout the UK. A quality and cost effective solution frequently specified for new build and upgrade applications.

Key Features

- Surface mount bolt-down or back-to-wall installation. Bolt down through integral base flange or rear of enclosure.
- Quality GRP construction with UV stable gel coat finish
- Generous access door
- Quarter turn latch fitted as standard, will accept standard padlock for security (padlock not supplied). Other latch options available on request.
- **1/2" or 3/4" hose union tap fitted with in-line double check valve and insulated MDPE plumbing to suit**
- Installed height 1.1m (to match standard FOX Pillar when installed part buried)

Side Hinge or bottom hinge door option



1/2" or 3/4" hose union tap fitted as standard with in-line double check valve and insulated MDPE pipe work to suit.

FOX S Pillar

Standpipe Enclosure, Surface Mount

Detailed Description:


FOX S pillar surface mount standpipe enclosure. FRP construction using Lloyds approved materials and finished with UV stable Olive Green gel-coat. Bottom hinge access door fitted with 1/4 turn latch to accept padlock (not supplied), side hinging available as option. Fitted with **BS1010 DZR 1/2" or 3/4" hose union bib tap, insulated MDPE pipe work to suit with in-line double check valve**. Isolation valve can be fitted as option. Specification readily adapted to customer requirements.

The installer is responsible for ensuring the suitability of the specification for the application.

Standard parts, alternative configuration on request:

Part No.	Description
FS001	FOX S Pillar, Single piece FRP body with Olive Green gel-coat finish, bottom hinge access door with 1/4 latch to accept padlock (not supplied), Housing Only
FS050	As above with 1/2" hose union tap, in-line double check valve, insulated 20mm MDPE pipe work
FS075	As above with 3/4" hose union tap, in-line double check valve, insulated 25mm MDPE pipe work

Dimensions:

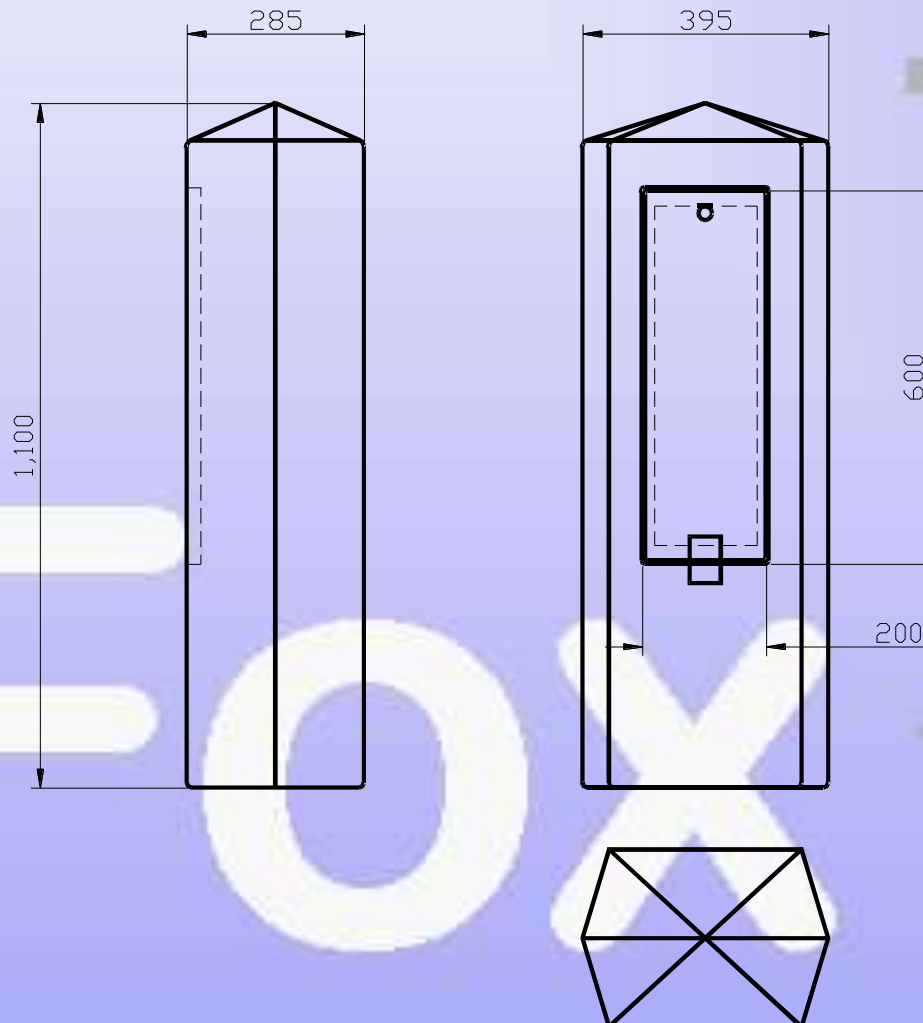

dimensions in mm